

GUPER Non-woven

REINFORCEMENT
Non-woven support


PRODUCT DESCRIPTION

Non woven are mainly used for their convenient price or their high sophisticated characteristics. Some parts of the shoes and leather goods suffer high-tension stress that can be solved using light but resistant non woven products (polyester, polypropylene, nylon).

TECHNICAL DATA

CODE	SUPPORT	Available Adhesive
750	Polyester	Termoadhesive
751	Polyester	TAG
752	Polyester	TAG
755	Polyester	TAG
760	Polypropylene	Autoadhesive
761	Polypropylene	Autoadhesive
762	Polypropylene	Autoadhesive
765	Polyester	TAG
768	Polyester	TAG
776	Polypropylene	Autoadhesive
778	Polypropylene	Autoadhesive
779	Polypropylene	Autoadhesive

PRODUCT CHARACTERISTICS

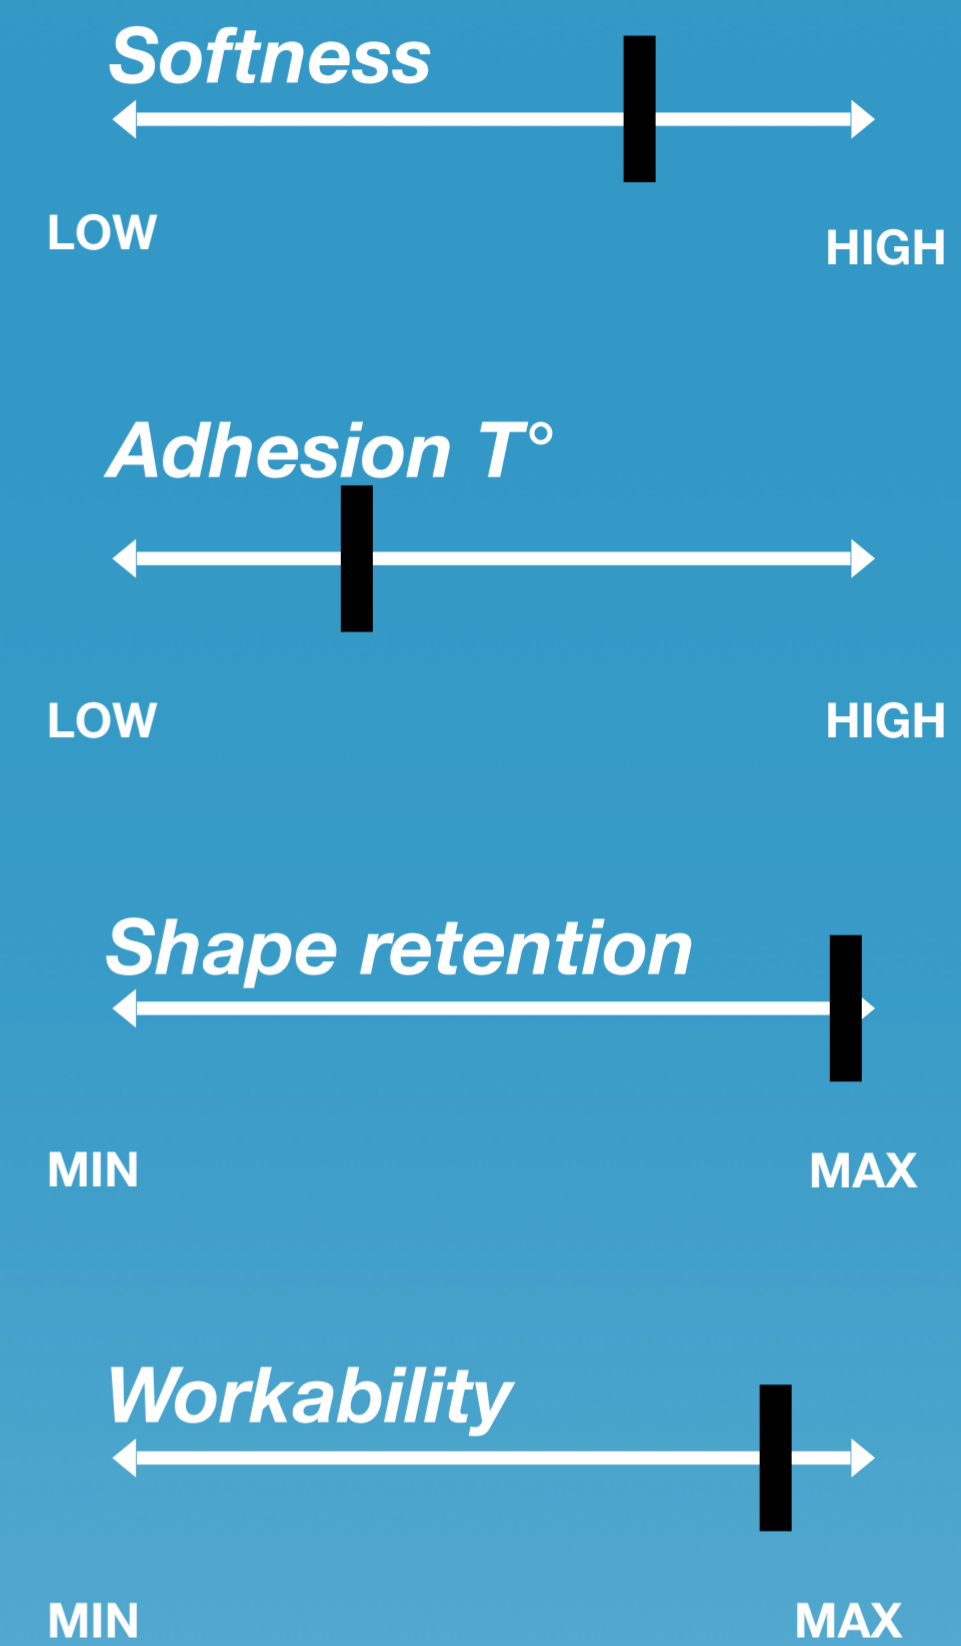

BENEFITS

- ✓ Excellent strength
- ✓ Cheap
- ✓ Adhesion at low temperature

RECOMMENDED FOR

- ✓ Technical articles

METHOD OF USAGE:

Direction of cutting: machine direction

The reinforcement material is positioned on the leather and pressed using a pneumatic press or a lasting machine.

- Temperature of the shape: from 90°C to 150°C depending on the nature of lining and upper used (natural or synthetic).

- Contact time: from 4 to 12 seconds (high operating temperatures allow contact times reduced and vice versa).

- Pressure: 3-5 atm

The moulding with leather material is, subsequently, done mechanically forcing the back part of the upper between two heated plates with setting temperature of 70-90°C for 15-45 seconds. For long lasting time we advice you to work with temperature lower than 80°C.

ATTENTION: do not exposure to direct sunlight and do not store in hot and humid places.

EM 01 25/06/2021

 **MADE IN ITALY**
This Statement has been released on request, on the basis of our best actual knowledge