

TALYN



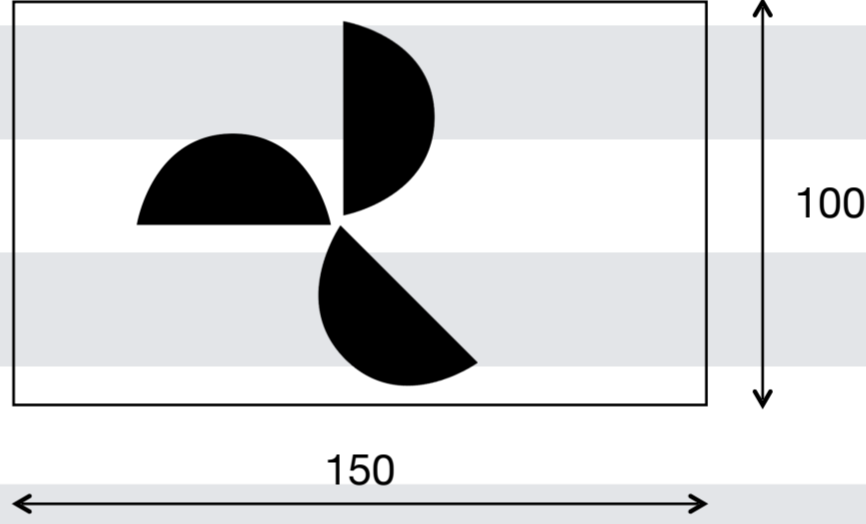
Serie 46-49 - PU FAMILY

RIGID TOE-PUFF
WITH PU ADHESIVE

PRODUCT DESCRIPTION

TALYN is an extruded material for toe-puffs, with a “ping-pong” effect. Talyn range is available in a rigid version with the polyurethane with two backer on one or both sides.

TECHNICAL DATA

| Talyn | Thickness* (mm) | Cutting Direction |
|------------|-----------------|---|
| 463 - APP1 | 0,50 - 0,60 |  |
| 465 - APP1 | 0,65 - 0,75 | |
| 467 - APP1 | 0,80 - 0,90 | |
| 469 - APP1 | 0,95 - 1,05 | |
| 491 - APP1 | 1,15 - 1,25 | |
| 493 - APP1 | 1,30 - 1,40 | |
| 495 - APP1 | 1,40 - 1,50 | |
| 463 - APP2 | 0,55 - 0,65 | |
| 465 - APP2 | 0,70 - 0,80 | |
| 467 - APP2 | 0,85 - 0,95 | |
| 469 - APP2 | 1,00 - 1,10 | |
| 491 - APP2 | 1,20 - 1,30 | |

* All thickness values have a natural variation of $\pm 0,05\text{mm}$

INSTRUCTIONS OF USE

The toe puff is applied by a special pneumatic pressing machine, equipped with heated curved plate, timer and thermostat. Advisable working condition:

- Temperature: from 130°C to 150°C.
- Contact time: from 6 to 12 seconds according to the thickness of the article.
- Minimum effective interface temperature: 100°C

We recommend you to carry out a preliminary test of bonding as the conditions of application may vary depending on the characteristics of the upper.

There is no binding time as to the lasting period.

ATTENTION: the application of solvent glue can affect the adhesive present on the sheet, causing detachment.

PRODUCT CHARACTERISTICS

RIGIDITY



SHAPE RETENTION



WORKABILITY



RESILIENCE



BENEFITS

- ✓ Excellent adaptability
- ✓ Ping-pong effect
- ✓ Highly moldable
- ✓ Recyclable
- ✓ Easy fit

RECOMMENDED FOR

- ✓ Sneakers
- ✓ Point shoes

 **MADE IN ITALY**

This Statement has been released on request, on the basis of our best actual knowledge

EM 01 11/11/2020

 **VEGAN FRIENDLY**

 **MADE WITH RENEWABLE ENERGY.**

 **RECYCLABLE. SCRAPS REUSED IN THE PRODUCTION PROCESS.**