





EXTRA SOFT TOE PUFF
With EVA adhesive

S7 Serie - TAG FAMILY

### PRODUCT DESCRIPTION

**TALYN S** is a Recycled Extruded Material for toepuffs, which has excellent resilience. It's made up of a percentage of the cutting and skiving waste that can be recycled back into the product.

This **TALYN S** range is an extra soft version with a single backer coated with a traditional EVA hot melt adhesive.

#### TECHNICAL DATA

Talyn	Thickness* (mm)	Cutting Direction
S71 - TAG1	0,30 - 0,40	
S72 - TAG1	0,40 - 0,50	
S73 - TAG1	0,50 - 0,60	
S75 - TAG1	0,70 - 0,80	100
S77 - TAG1	0,85 - 0,95	
S72 - TAG2	0,45 - 0,55	← 150
S73 - TAG2	0,55 - 0,65	
S75 - TAG2	0,75 - 0,85	
S77 - TAG2	0,90 - 1,00	

<sup>\*</sup> All thickness values have a natural variation of ± 0,05mm

### **INSTRUCTIONS OF USE**

The toe puff is applied by a special pneumatic pressing machine, equipped with heated curved plate, timer and thermostat.

Advisable working condition:

- Temperature: from 130°C to 150°C.
- Contact time: from 6 to 12 seconds according to the thickness of the article.
- Minimum effective interface temperature: 100°C

We recommend you to carry out a preliminary test of bonding as the conditions of application may vary depending on the characteristics of the upper.

There is no binding time as to the lasting period.

**ATTENTION**: the application of solvent glue can affect the adhesive present on the sheet, causing detachment.


# VEGAN FRIENDLY





EM 01 11/11/2020

# PRODUCT CHARACTERISTICS

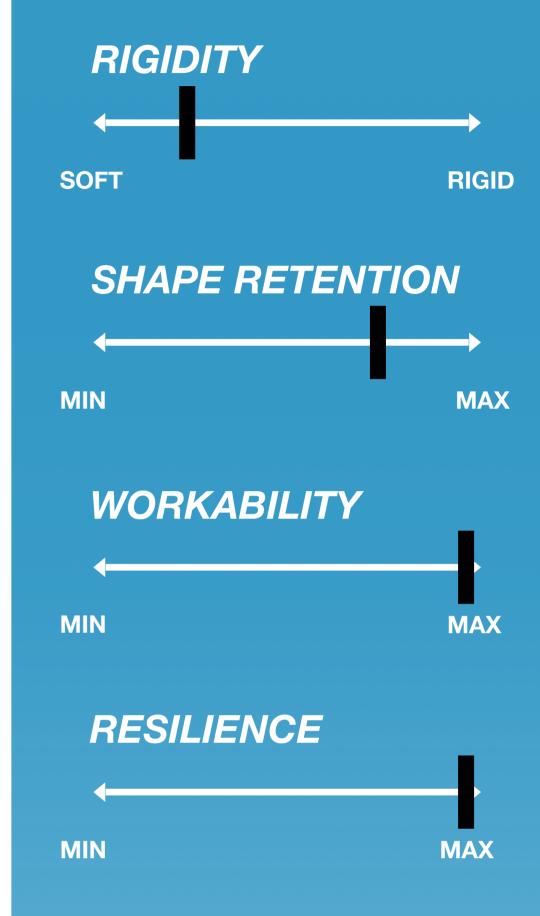

## BENEFITS

- **Excellent** adaptability
- Ping-pong effect
- Highly moldable
- Recyclable
- Easy fit

## RECOMMENDED FOR









This Statement has been released on request, on the basis of our best actual knowledge