





SEMI RIGID TOE PUFF
With PU adhesive

#### PRODUCT DESCRIPTION

TALYN is an extruded material for toe-puffs, with a "ping-pong" effect. This Talyn is a semi rigid version with PU adhesive with two backers

#### TECHNICAL DATA

Talyn	Thickness* (mm)	Cutting Direction
472 - TMS1	0,50 - 0,60	
473 - TMS1	0,55 - 0,65	100
475 - TMS1	0,65 - 0,75	150
477 - TMS1	0,85 - 0,95	<b>←</b>
479 - TMS1	1,10 - 1,20	

<sup>\*</sup> All thickness values have a natural variation of  $\pm$  0,05mm

Talyn	Thickness* (mm)	Cutting Direction
473 - TMS2	0,65 - 0,75	
475 - TMS2	0,75 - 0,85	100
477 - TMS2	0,95 - 1,05	
479 - TMS2	1,20 - 1,30	← 150

<sup>\*</sup> All thickness values have a natural variation of ± 0,05mm

### **INSTRUCTIONS OF USE**

The toe puff is applied by a special pneumatic pressing machine, equipped with heated curved plate, timer and thermostat.

Advisable working condition:

- Temperature: from 130°C to 150°C.
- Contact time: from 6 to 12 seconds according to the thickness of the article.
- Minimum effective interface temperature: 100°C

We recommend you to carry out a preliminary test of bonding as the conditions of application may vary depending on the characteristics of the upper.

There is no binding time as to the lasting period.

ATTENTION: the application of solvent glue can affect the adhesive present on the sheet, causing detachment.



## **VEGAN FRIENDLY**




MADE WITH RENEWABLE ENERGY.



RECYCLABLE. SCRAPS REUSED IN THE PRODUCTION PROCESS.

EM 01 11/11/2020

# PRODUCT CHARACTERISTICS

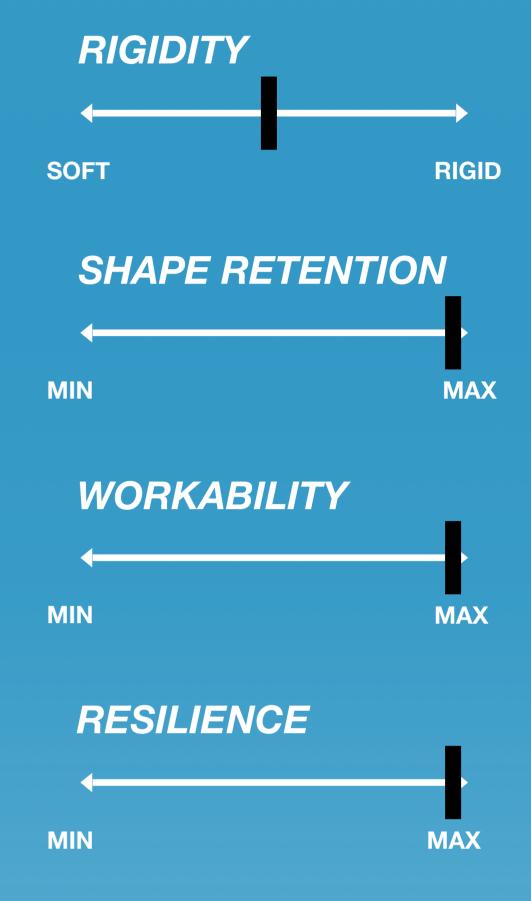

### **BENEFITS**







## RECOMMENDED FOR







