


RELION Z

SEMI RIGID COUNTERS
Two polyester fabric backers
with PU adhesive

PRODUCT DESCRIPTION

The **RELION Z family** is the latest development in the production of extruded counter materials. It represents the best value for money and performance. It provides excellent flexibility and elastic properties. It has easy workability and special moulding properties: very high resiliency and excellent shape reproduction and retention. It is suitable for all types of footwear.

TECHNICAL DATA

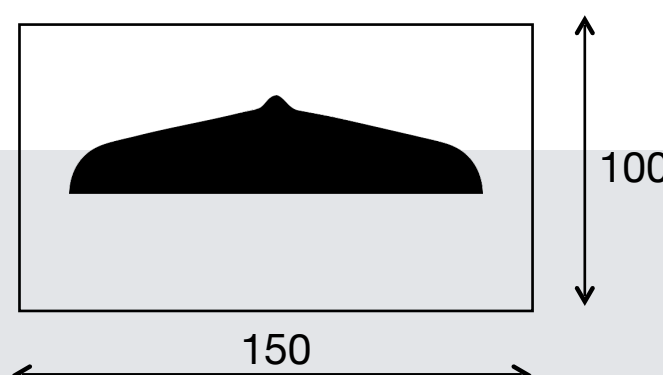RELION Z	Thickness* (mm)	Cutting direction
RELION Z - 06	0,75 - 0,85	
RELION Z - 08	0,95 - 1,05	
RELION Z - 09	1,00 - 1,10	
RELION Z - 10	1,15 - 1,25	
RELION Z - 12	1,35 - 1,45	

* All thickness values have a natural variation of $\pm 0,05\text{mm}$

INSTRUCTIONS OF USE

Relion Z can be used both by preheating the material before insertion both placing the cold material between lining and upper.

1) USE WITH PREHEATING

The counter stretched can be warmed to 70-80°C on a Teflon's hot plate that allows optimum control of the temperature. Other heat sources can also be used as ovens, lamps and hot steam. The counter so heated softens quickly. As the special polymer compound is not sticky fingers, the operator can manually enter the counter between upper and lining without any problem. The counter is then glued and formed with a backpart moulding machine. What optimum working conditions suggest:

- Temperature of the form: from 110°C to 130°C depending on the nature of lining and upper used (natural or synthetic).
- Minimum effective interface temperature: 100°C
- Contact time: from 10 to 15 seconds (high operating temperatures allow contact times reduced and vice versa).

2) USE WITHOUT PREHEATING

The material is placed between liner and upper and formed using a backpart moulding machine. We recommend the following working conditions:

- Temperature of the shape: 140-150°C depending on the nature of lining and upper used (natural or synthetic).
- Minimum effective interface temperature: 100°C
- Contact time: from 10 to 15 seconds (high operating temperatures allow contact times reduced and vice versa).

In case of backpart moulding machine with two positions, the subsequent cold stabilization allows to obtain a counter perfectly shaped.

ATTENTION: the application of solvent glue can affect the adhesive present on the sheet, causing detachment.

PRODUCT CHARACTERISTICS

RIGIDITY 

SOFT RIGID

SHAPE RETENTION 

MIN MAX

WORKABILITY 

MIN MAX


RESILIENCE 

MIN MAX

BENEFITS

-  Ping-pong effect
-  Highly moldable
-  Recyclable
-  Produced with Recycled scraps

RECOMMENDED FOR


-  Sneakers
-  Boots
-  Point shoes
-  Décolleté shoes
-  Casual shoes

 **MADE IN ITALY**

This Statement has been released on request, on the basis of our best actual knowledge



VEGAN FRIENDLY



MADE WITH RENEWABLE ENERGY.



RECYCLABLE. SCRAPS REUSED IN THE PRODUCTION PROCESS.

EM 01 11/11/2020